



PL3033




Up & Down LED Pendant Light

Description

Pendant Light for indoor use.
Compact MINI drop;
Low glare design;

Finish
Black/White

Material
Aluminium

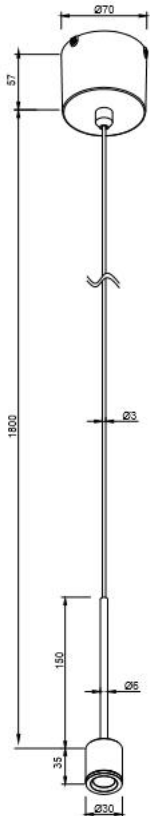

TECHNICAL CHARACTERISTICS

Light source

Light source: Osram Oslon Square
Output (W): 700mA 3V 2.1W
Total power consumption (W): 2.4
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 140
Qty Leds: 1
Lm/Real W: 68
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: 19

GEAR

This product is supplied with
Actec MINID70004NT phase-cut dim
LED driver.

Luminaire

Surface Pendant Light suitable for
indoor area
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 2700K spot 18°

h(m)	E(lx)	Ø(m)
1	551.1	Ø0.32
2	137.8	Ø0.65
3	61.23	Ø0.97
4	34.44	Ø1.30
5	22.04	Ø1.62

Photometric 2700K 18D Ra.90

LIGHT DISTRIBUTION for 2700K medium 24°

h(m)	E(lx)	Ø(m)
1	402.4	Ø0.44
2	100.6	Ø0.88
3	44.71	Ø1.31
4	25.15	Ø1.75
5	16.09	Ø2.19

Photometric 2700K 24D Ra.90

The photograph may not match thereference
exactly. Please read the product description to
identify the finish.