




**PL3031  
LED LINEAR LIGHT**



**PL3031**

**■ FEATURES**

- Screwless & linkable design;
- Combined surface mount or suspended installation methods;
- CRI>90;
- Custom made single CCT or tunable white(e.g. 2200-4400K Ra.90) basic linear from Osram;
- Adoptable Osram Dali tunable white & diming system;
- 0-10V or on/off gear tray supplied as an option;




**Application**



Widely used shopping malls, supermarkets, franchise houses, warehouse and any places which need high lumen output.

**■ DIMENSION**

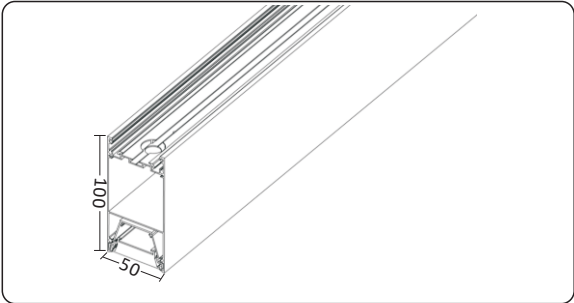


**PL3031**




**Length:1130mm**

## ■ PHOTOS OF THE PRODUCT

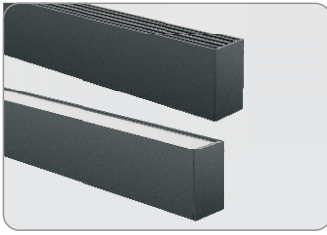

PL3031

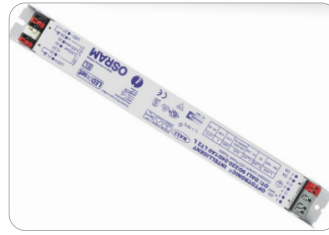

LED Power supply



LEDModule



Flexible PC cover



Pendent accessory




Surface Mounted accessory


## ■ PRODUCT SPECIFICATIONS

Model no.:	PL3031	luminous flux:	$2700 \pm 200\text{lm}$
Size:	1130*50*100mm	Efficiency:	$90 \pm 5\text{lm/w}$
Type:	Pendent, Surface Mounted	CRI:	$\geq 90\text{Ra}$
Color:	White/Black	SDCM:	$\leq 3$ step
Surface finish:	Powder coating/Anodizing	Input voltage:	200-240VAC
Diffuser materials:	PMMA cover	IP rating:	IP20
Light source:	SMD2835	PF:	$\geq 0.95$
LED quantity:	288pcs	Dimming:	Dali/0-10V/On-off
Power consumption:	30W	Life span:	50000 hrs
Color temperature:	2700K/3000K/4000K/Tunable-white	Operating temperature:	-25~+55 deg
Beam angle:	80 degree	Max. humidity:	80%
Application:	Indoor	Warranty:	5 years

■ PHOTOMETRIC DIAGRAM

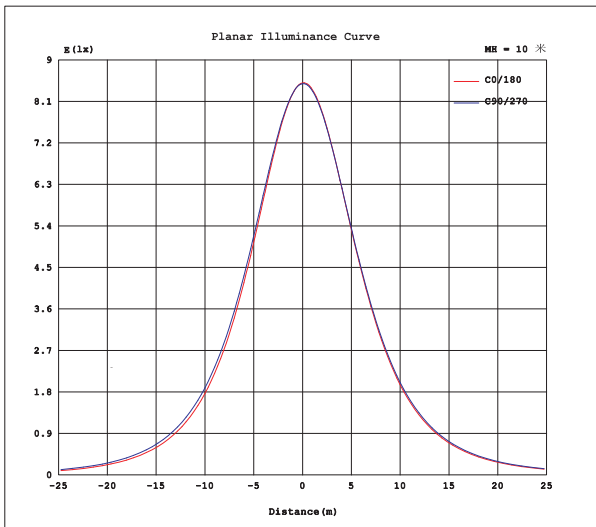


Luminous intensity distribution diagram

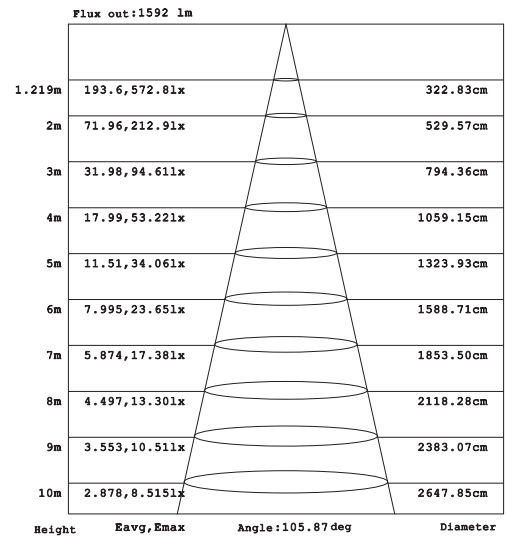

Illumination distribution diagram


\*Please ask your sales representative for detailed IES files.

■ PACKING INFORMATION

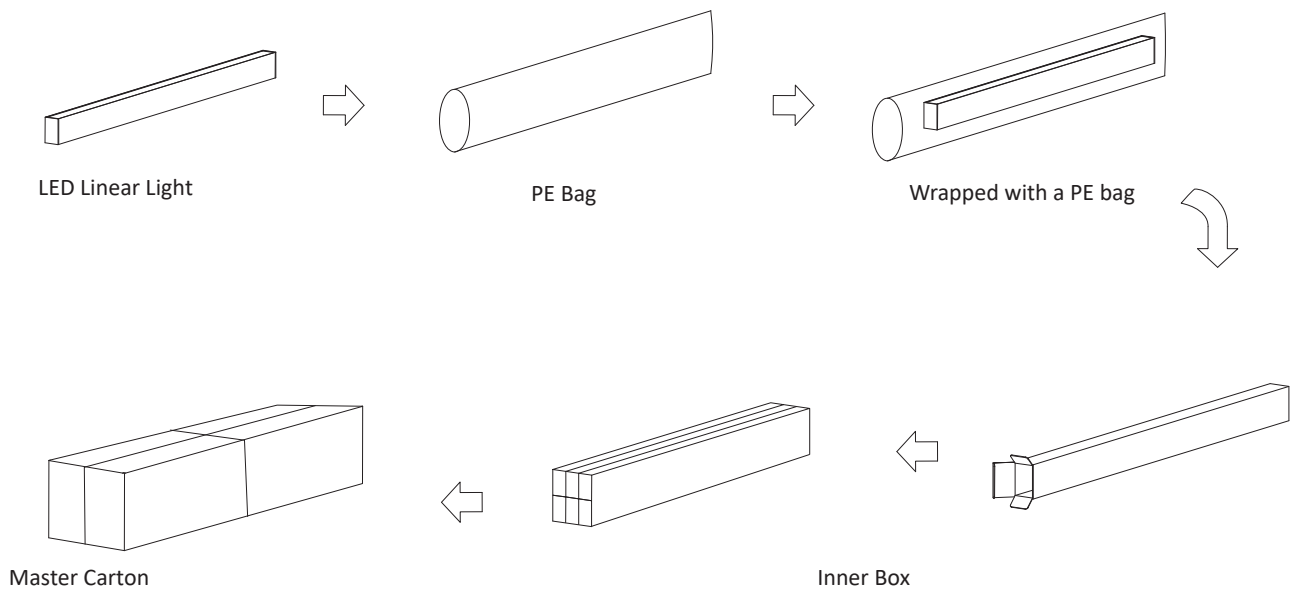


Item No.	PCS/Carton	Inner box size (mm)	Master Carton Size (mm)	Total N.W	Total G.W
PL3031	8	L1184*W90*H147	L1214*W300*H265mm	15.05KG	18KG

■ PROFILE INSTALLATION

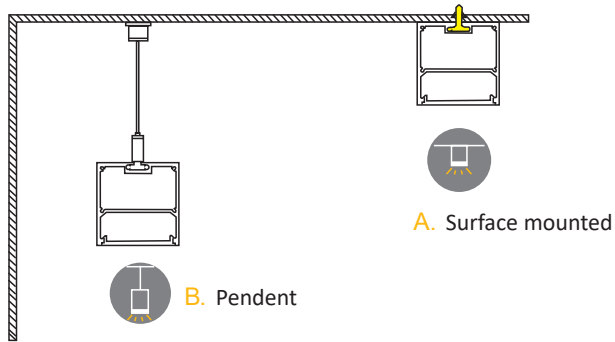

INSTALLATION ACCESSORIES



Suspending accessories

- a. Steel cables
- b. Raw plug
- c. Screws
- d. Holding screws
- e. Mounting caps



Mounted accessories

- 1. Mounting clips
- 2. Raw plug
- 3. Screws

Installation with seamless connection

