


Product Description: 2W Goose Neck Wall Recessed Reading Light
Model: WL3050

Technical Data

+

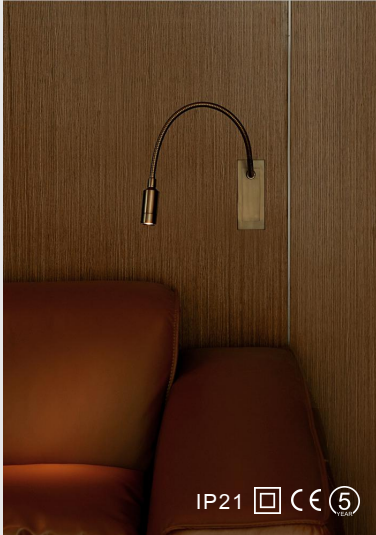

Light source	Cree XPE-2
System wattage	2W (500mA, 3V)
Lumen flux	180lm (2W, 3000K, Ra.80)
Colour temperature	2700K, 3000K, 4000K
Colour rendering index	Ra≥80
Chromaticity rate	3 MacAdam
Beam angle	40D, Lens Type
Service lifetime	50,000hrs, L70
Ingress protection	IP21 Installed
Operation voltage	220-240Vac, 50/60Hz
Operation temperature	-20~40D
Protection class	II
Finishing	White RAL9003, Gloss 5 Black RAL9005, Gloss 5 Titian Gold
Construction	Aluminum
Mounting	Wall Recessed
Warranty	5 years
Lighting control	Actec non-dim, ECG standard Actec triac dim

Ordering Data

Features

+

WL3050					
Model	Finish	Power	CCT	CRI	Beam
	• AW • AB • TG	• 2	• 27 • 30 • 40	• R80	• 40D

- Stylish design
- Quiet goose neck

Accessories

- N/A

Diagram

+

