

DL3375

20W Recessed Adjustable Downlight with Specular Baffle

Description

Downlight for indoor use;
Extreme low UGR design;
Baffle available in specular, matt and brushed finishing

Finish
Black/White

Material
Aluminium



18D



30D



50D

TECHNICAL CHARACTERISTICS

Light source

Light source: Citizen CLU028 1204
Output (W): 350mA 35.5V 12.4W
500mA 35.5V 17.5W
Total power consumption (W): 14.5W/20W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 901lm@350mA
Lm/Real W: 72.66
Life Time: 50.000h L90B20
MacAdam steps: 3
UGR: 0

GEAR


This product is supplied without gear.

Recommended gear:

TCI mini Jolly 20(DALI/O-10V)


Luminaire

IP20 for indoor using
crossing: No
Warranty: 5 Years

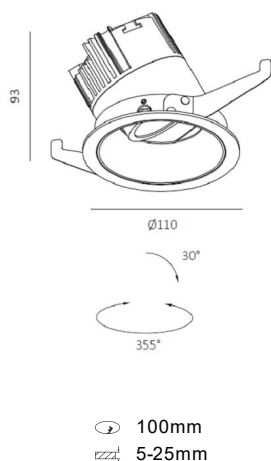

LIGHT DISTRIBUTION for 2700K wide 18.6°

h(m)	E(lx)	Ø(m)
1	6043	Ø0.32
2	1151	Ø0.64
3	671.4	Ø0.97
4	377.7	Ø1.28
5	241.7	Ø1.61



The photograph may not match the reference exactly. Please read the product description to identify the finish.