



Gyro ONE

Surface



Wall



Pendant



The Gyro 70

Multipule Frame accessories;
All directional Tilt;
Interchangeable Lens;
Add-on Honeycomb Louver;
IP65 for recessed and wall mounted;
IP54 for surface mounted and pendent;
Multipule Frame accessories;



Deep Semi



Semi



Quaternary



Triple



Twin



Square

IP65

10w
LED

DL3705

10W IP65 355D Tilttable LED downlight

Description

Deep Recessed Slim Trim Downlight
Gyro Titable Add-on Honey comb louver
IP65

Finish

Black/White

Material

Aluminium



24D

36D

50D

TECHNICAL CHARACTERISTICS

Light source


Light source: CLU7A3-1201
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 700lm
Qty Leds: 1pc
Lm/Real W: 70lm
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: 19

Gear

This product is supplied without gear;
Recommended gear:
Actec Triac Dimmable driver
D26012NTF

Luminaire


Downlight suitable for outdoor area
crossing: No
Warranty: 5 Years

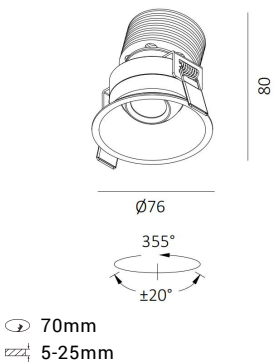

LIGHT DISTRIBUTION for 3000K Medium 36°

h(m)	E(lx)	Ø(m)
1	1019.2	Ø6.60
2	254.9	Ø1.32
3	113.3	Ø1.98
4	63.71	Ø2.64
5	40.78	Ø3.30

The photograph may not match the reference exactly. Please read the product description to identify the finish.

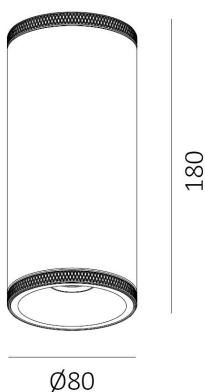

SD3177

10W IP54 355D Tiltable Surface Mounted LED Light

Description

Deep Recessed Slim Trim Downlight
Gyro Tiltable Add-on Honey comb louver
IP65

Finish

Black/White

Material

Aluminium



24D

36D

50D

TECHNICAL CHARACTERISTICS

Light source

Light source: CLU7A3-1201
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 700lm
Qty Leds: 1pc
Lm/Real W: 70lm
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: 19

Gear

This product is supplied without gear;
Recommended gear:
Actec Triac Dimmable driver
D26012NTF


Luminaire

Downlight suitable for outdoor area
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Medium 36°

h(m)	E(lx)	Ø(m)
1	1019.2	Ø6.60
2	254.9	Ø1.32
3	113.3	Ø1.98
4	63.71	Ø2.64
5	40.78	Ø3.30

The photograph may not match the reference exactly. Please read the product description to identify the finish.



WL3172


10W IP65 355D Tilttable LED Wall Light

Description

Deep Recessed Slim Trim Downlight
Gyro Tilttable Add-on Honey comb louver
IP65

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: CLU7A3-1201
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 700lm
Qty Leds: 1pc
Lm/Real W: 70lm
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: 19

Gear

This product is supplied without gear;
Recommended gear:
Actec Triac Dimmable driver
D26012NTF



Luminaire

Downlight suitable for outdoor area
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Medium 36°

h(m)	E(lx)	Ø(m)
1	1019.2	Ø6.60
2	254.9	Ø1.32
3	113.3	Ø1.98
4	63.71	Ø2.64
5	40.78	Ø3.30

The photograph may not match the reference exactly. Please read the product description to identify the finish.

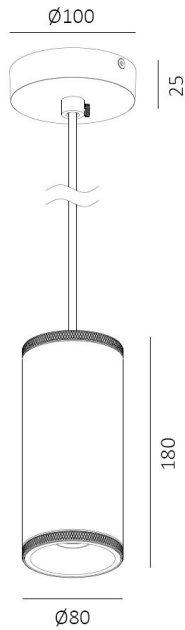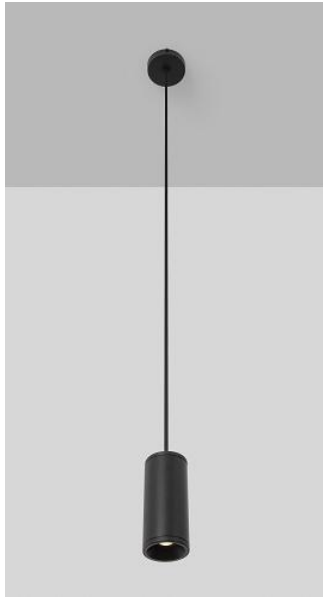

PL3073


10W IP54 355D Tiltable LED Pendant Light

Description

Deep Recessed Slim Trim Downlight
Gyro Titable Add-on Honey comb louver
IP65

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: CLU7A3-1201
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 700lm
Qty Leds: 1pc
Lm/Real W: 70lm
Life Time: 50.000h L80B20
MacAdam steps: 3
UGR: 19

Gear

This product is supplied without gear;
Recommended gear:
Actec Triac Dimmable driver
D26012NTF

Luminaire

Downlight suitable for outdoor area
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 3000K Medium 36°

h(m)	E(lx)	Ø(m)
1	1019.2	Ø6.60
2	254.9	Ø1.32
3	113.3	Ø1.98
4	63.71	Ø2.64
5	40.78	Ø3.30

The photograph may not match the reference exactly. Please read the product description to identify the finish.