

**DL3828**

**10W Trim Adjustable Downlight**




**Description**

Slim trim & adjustable design;  
Low glare reflector;  
IP54;  
With fire retardant cotton;

**Finish**  
Black/White

**Material**  
Aluminium



**TECHNICAL CHARACTERISTICS**

**Light source**


Light source: Luminus CXM-4  
Output (W):9W (250mA 36V)  
Total power consumption (W): 10W  
Color temperature: 2700K/3000K/4000K  
CRI: 90  
Photobiological risk: RG1  
Real Lumen: 650lm  
Qty Leds: 1  
Lm/Real W: 65lm  
Life Time: 50.000h L90B20  
MacAdam steps: 3  
UGR: 17

**GEAR**

This product is supplied without gear.

**Luminaire**


Crossing: No  
Warranty: 5 Years

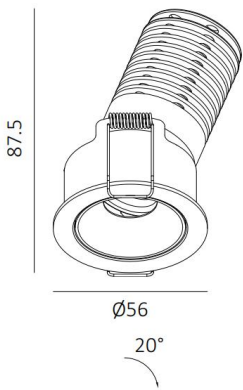

50mm  
5-25mm

**LIGHT DISTRIBUTION for 3000K  
Medium 24°**

h(m)	E(lx)	Ø(m)
1	1474	Ø0.68
2	368.4	Ø1.37
3	163.7	Ø2.05
4	92.10	Ø2.74
5	58.94	Ø3.42

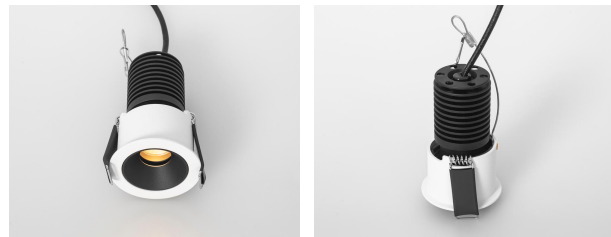

The photograph may not match the reference exactly. Please read the product description to identify the finish.