

75mm
5-25mm

DL3717

10W Deep Slim Trim Fixed LED downlight

Description

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Citizen CLU02Q-1202
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 855(24D)/ 947(38D) /884(60D)
Qty Leds: 1pc
Lm/Real W: Min.85.5
Life Time: 50.000h L80B20
MacAdam steps: 2
UGR: <19

Gear

This product is supplied without gear;
Recommended gear:
Actec Triac Dimmable driver
D26012NTF

Luminaire

Downlight suitable for indoor area
in compliance with IC-F
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 2700K Narrow 24°

h(m)	E(lx)	Ø(m)
1	2268	Ø0.49
2	567.1	Ø0.98
3	252	Ø1.48
4	141.8	Ø1.97
5	90.73	Ø2.46

LIGHT DISTRIBUTION for 2700K Medium 38°


h(m)	E(lx)	Ø(m)
1	1407	Ø0.71
2	351.7	Ø1.43
3	156.3	Ø2.15
4	87.92	Ø2.86
5	56.27	Ø3.58

LIGHT DISTRIBUTION for 2700K Wide 60°

h(m)	E(lx)	Ø(m)
1	936.2	Ø1.14
2	234	Ø2.29
3	104	Ø3.44
4	58.51	Ø4.59
5	37.45	Ø5.74



The photograph may not match the reference exactly. Please read the product description to identify the finish.

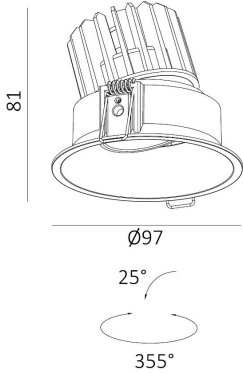

90mm
5-25mm

DL3718

10W Deep Slim Trim Adjustable LED downlight

Description

Slim trim & deep adjustable design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Citizen CLU02Q-1202
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 855(24D)/ 947(38D) /884(60D)
Qty Leds: 1pc
Lm/Real W: Min.85.5
Life Time: 50.000h L80B20
MacAdam steps: 2
UGR: <19

Gear

This product is supplied without gear;
Recommended gear:
Actec Triac Dimmable driver
D26012NTF

Luminaire

Downlight suitable for indoor area
in compliance with IC-F
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 2700K Narrow 24°

h(m)	E(lx)	Ø(m)
1	2268	Ø0.49
2	567.1	Ø0.98
3	252	Ø1.48
4	141.8	Ø1.97
5	90.73	Ø2.46

LIGHT DISTRIBUTION for 2700K Medium 38°



h(m)	E(lx)	Ø(m)
1	1407	Ø0.71
2	351.7	Ø1.43
3	156.3	Ø2.15
4	87.92	Ø2.86
5	56.27	Ø3.58

LIGHT DISTRIBUTION for 2700K Wide 60°

h(m)	E(lx)	Ø(m)
1	936.2	Ø1.14
2	234	Ø2.29
3	104	Ø3.44
4	58.51	Ø4.59
5	37.45	Ø5.74



The photograph may not match the reference exactly. Please read the product description to identify the finish.



75*75mm
5-25mm

DL3721


10W Deep Slim Trim Fixed Square LED downlight

Description

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Citizen CLU02Q-1202
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 855(24D)/ 947(38D) /884(60D)
Qty Leds: 1pc
Lm/Real W: Min.85.5
Life Time: 50.000h L80B20
MacAdam steps: 2
UGR: <19

Gear

This product is supplied without gear;
Recommended gear:
Actec Triac Dimmable driver
D26012NTF

Luminaire

Downlight suitable for indoor area
in compliance with IC-F
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 2700K Narrow 24°

h(m)	E(lx)	Ø(m)
1	2268	Ø0.49
2	567.1	Ø0.98
3	252	Ø1.48
4	141.8	Ø1.97
5	90.73	Ø2.46

LIGHT DISTRIBUTION for 2700K Medium 38°


h(m)	E(lx)	Ø(m)
1	1407	Ø0.71
2	351.7	Ø1.43
3	156.3	Ø2.15
4	87.92	Ø2.86
5	56.27	Ø3.58

LIGHT DISTRIBUTION for 2700K Wide 60°

h(m)	E(lx)	Ø(m)
1	936.2	Ø1.14
2	234	Ø2.29
3	104	Ø3.44
4	58.51	Ø4.59
5	37.45	Ø5.74



The photograph may not match the reference exactly. Please read the product description to identify the finish.



90*90mm
5-25mm

DL3722

10W Deep Slim Trim Adjustable Square LED downlight

Description

Slim trim & deep adjustable design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Finish
Black/White

Material
Aluminium



TECHNICAL CHARACTERISTICS

Light source

Light source: Citizen CLU02Q-1202
Output (W): 9W (250mA 36V)
Total power consumption (W): 10W
Color temperature: 2700K/3000K/4000K
CRI: 90
Photobiological risk: RG1
Real Lumen: 855(24D)/ 947(38D) /884(60D)
Qty Leds: 1pc
Lm/Real W: Min.85.5
Life Time: 50.000h L80B20
MacAdam steps: 2
UGR: <19

Gear

This product is supplied without gear;
Recommended gear:
Actec Triac Dimmable driver
D26012NTF

Luminaire

Downlight suitable for indoor area
in compliance with IC-F
crossing: No
Warranty: 5 Years

LIGHT DISTRIBUTION for 2700K Narrow 24°

h(m)	E(lx)	Ø(m)
1	2268	Ø0.49
2	567.1	Ø0.98
3	252	Ø1.48
4	141.8	Ø1.97
5	90.73	Ø2.46

LIGHT DISTRIBUTION for 2700K Medium 38°

h(m)	E(lx)	Ø(m)
1	1407	Ø0.71
2	351.7	Ø1.43
3	156.3	Ø2.15
4	87.92	Ø2.86
5	56.27	Ø3.58

LIGHT DISTRIBUTION for 2700K Wide 60°

h(m)	E(lx)	Ø(m)
1	936.2	Ø1.14
2	234	Ø2.29
3	104	Ø3.44
4	58.51	Ø4.59
5	37.45	Ø5.74



The photograph may not match the reference exactly. Please read the product description to identify the finish.