




32-35mm
5-25mm

DL3437

8W Power Deep Recessed Downlight

Description

Downlight for indoor use and outdoor use.

Low UGR design

Slim trim design

Finish

Black/White

Material

Aluminium



24D

36D

60D

TECHNICAL CHARACTERISTICS

Light source

Light source: Citizen CLU7A3-1201

Output (W): 200mA 36V 7.2W

Total power consumption (W): 8W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 512lm

Qty Leds: 1

Lm/Real W: 64

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR: 19


Gear

This product is supplied without gear.

Luminaire

crossing: No

Warranty: 5 Years

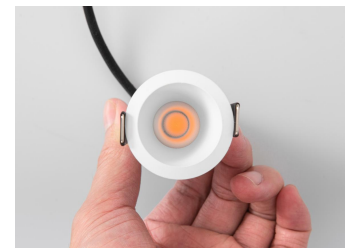

Light Distribution For 3000K


small 16.5°

h(m)	E(lx)	Ø(m)
1	2645	Ø0.29
2	661.2	Ø0.58
3	293.9	Ø0.87
4	165.3	Ø1.16
5	105.8	Ø1.45

medium 33.2°

h(m)	E(lx)	Ø(m)
1	1985	Ø0.35
2	496.3	Ø0.70
3	220.3	Ø1.06
4	124.1	Ø1.41
5	79.41	Ø1.77

The photograph may not match the reference exactly. Please read the product description to identify the finish.



DL3574

10W Power Deep Recessed Downlight

Description

Downlight for indoor use and outdoor use.

Low UGR design

Slim trim design

Finish

Black/White

Material

Aluminium



24D

36D

60D

TECHNICAL CHARACTERISTICS

Light source

Light source: Luminus CXM-6 COB

Output (W): 250mA 26V 9W

Total power consumption (W): 10W

Color temperature: 2700K/3000K/4000K

CRI: 90

Photobiological risk: RG1

Real Lumen: 690,

Qty Leds: 1

Lm/Real W: 69

Life Time: 50.000h L90B20

MacAdam steps: 3

UGR: 19


Gear

This product is supplied without gear.

Luminaire

crossing: No

Warranty: 5 Years

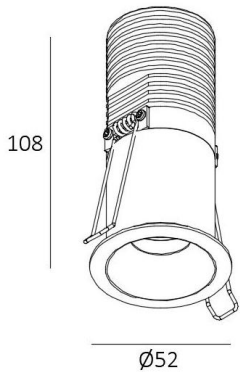

45mm
5-25mm

Light Distribution For 3000K

medium 20.8°

h(m)	E(lx)	Ø(m)
1	2357	Ø0.37
2	589.2	Ø0.74
3	261.9	Ø1.10
4	147.3	Ø1.47
5	94.28	Ø1.84

medium 36°

h(m)	E(lx)	Ø(m)
1	2120	Ø0.65
2	530.0	Ø1.30
3	235.5	Ø1.95
4	132.5	Ø2.60
5	84.80	Ø3.25



The photograph may not match the reference exactly. Please read the product description to identify the finish.