

## DL3421

### 7W Telescope Gimble Tiltable Recessed Spot Light




#### Description

Downlight for indoor use;  
Mini Snoot dia.20mm;  
0-25cm telescope snoot;  
30D gimble tiltable

**Finish**  
Black/White

**Material**  
Aluminium

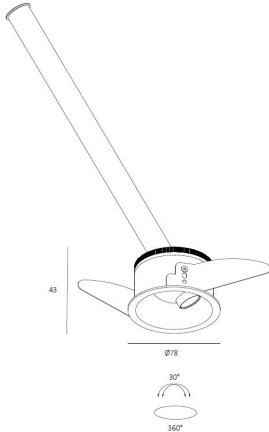

↻ 70mm  
▨ 5-25mm



#### TECHNICAL CHARACTERISTICS

##### Light source

Light source: CREE XHP-35  
Output (W): 500mA 12V 6.0W  
Total power consumption (W): 7.5  
Color temperature: 2700K/3000K/4000K  
CRI: 90  
Photobiological risk: RG1  
Real Lumen: 385  
Qty Leds: 1  
Lm/Real W: 64  
Life Time: 50.000h L90B20  
MacAdam steps: 3  
UGR: <12

##### GEAR

This product is supplied without gear.

##### Luminaire

IP54 for indoor using  
crossing: No  
Warranty: 5 Years

#### LIGHT DISTRIBUTION for 3000K medium 13°

h(m)	E (lx)	Ø(m)
1	2645	Ø0.29
2	661.2	Ø0.58
3	293.9	Ø0.87
4	165.9	Ø1.16
5	105.8	Ø1.45

Photometric 3000K 12D Ra.90



The photograph may not match thereference exactly. Please read the product description to identify the finish.